

PC-1860EN

The ceiling speakers of the PC-series are suitable for announcements and BGM system use in high quality. The speaker's design harmonizes with modern architecture and decor. The PC-1860EN is designed according to EN54-24.




Order no: PC-1860EN
 Alternative products: VM-3360VA,
 VM-3240VA, VP-2421, VP-2421incl, VP-2241,
 VP-2241incl, VP-2122incl, VP-2122, VP-2064,
 VP-2064incl, VP-3504, VP-3154, VP-3304,
 SX-2000SM, VX-2000, VX-3008F, VX-3004F,
 VX-3016F

Specifications

Frequency response	80 Hz - 20 kHz
Connection	Push wire connection (Bridging terminal - 2 branch type)
Speaker component	16 cm cone-type
Tappings	6/3/1,5/0,8 W (100V)3/1,5/0,8/0,4 W (70V)
Finish	Surface treated steel plate, white paint (RAL9016)

Appearance



CEILING MOUNT SPEAKER 5INCH 6W PC-1860EN

The PC-1860EN is certified according to the European Standard EN 54-24: 2008, DoP number is 19-010.


DESCRIPTION

The PC-1860EN is the voice alarm certification product. The PC-1860EN is suitable for announcement and BGM system use in high quality sound cone speaker. Speaker design that harmonize with the venue's architecture and decor. Thin panel does not clash with interior design.

SPECIFICATIONS


Rated Input	6 W (100 V line), 3 W (70 V line)
Rated Impedance	100 V line: 1.7 kΩ (6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise) 92 dB (1 W, 1 m) (100 Hz - 10 kHz, pink noise) 80 dB (1 W, 4 m) (100 Hz - 10 kHz, pink noise)
Maximum Sound Pressure Level	99 dB (6 W, 1 m) (100 Hz - 10 kHz, pink noise) 87 dB (6 W, 4 m) (100 Hz - 10 kHz, pink noise)
Frequency Response	80 Hz - 20 kHz (peak -20 dB)
Coverage Angle (-6 dB)	Horizontal and Vertical: 165° (500 Hz), 175° (1 kHz), 165° (2 kHz), 70° (4 kHz) according to EN 54-24
Environmental type	A (indoor applications)
Speaker Component	12 cm (5") cone-type
Dimensions for Fixing Hole	Mounting hole: $\phi 150 \pm 3$ mm (5.91" ± 0.12 ") Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring clamp
Applicable Cable	Solid wire: 0.5 - 3 mm ² (AWG 20 - 12)
Connection	Push wire connection (Bridging terminal-2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint
Dimensions	$\phi 180 \times 70$ (D) mm (7.09" \times 2.76")
Weight	560 g (1.23 lb)
Accessory	Paper pattern -1, Zip tie -2

APPEARANCE

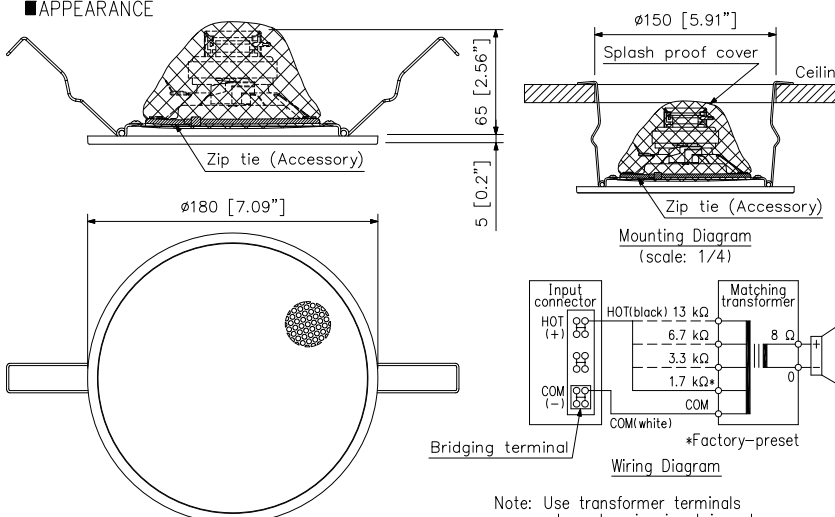

UNIT:mm SCALE:1/3

Wiring Diagram

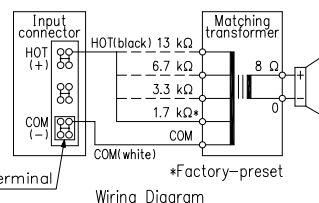

*Factory-preset

Note: Use transformer terminals when changing input impedance.